

FREE OSCILLATION OF AN INHOMOGENEOUS FLAT STRUCTURAL ELEMENT IN A VISCOELASTIC MEDIUM

V.L. Sharifov R.A. Allahverdiyev B.M. Aslanov E.A. Pashayev

Azerbaijan University of Architecture and Construction, Baku, Azerbaijan
vsharifov@mail.ru, a.r_1984@mail.ru, atiahi-amiu-thik@mail.ru, elcin_pasayev89@mail.ru

Abstract- As you know, circular plates made of various materials are widely used in mechanical engineering and instrumentation, in the construction of various kinds of engineering structures, etc. Due to the fact that artificial materials have been widely used in various fields of engineering and construction in recent years, the interest of engineering researchers is focused on creating new calculation methods that could take into account the real properties of the construction material and the environment as accurately as possible. This includes, in general, inhomogeneous, anisotropic materials and inhomogeneous anisotropic non-elastic bases. The theoretical and experimental study of the stability and vibrations of thin-walled plates and shells of various configurations with different physical and mechanical properties in different directions has attracted primary attention due to the widespread use of new materials in various structures, such as plywood, which has a sharp anisotropy. Currently, research in this area is intensively developing, the use of new materials in structures requires new approaches and the creation of new methods for design, and it becomes relevant due to the rapid development and introduction of fiberglass, which are also anisotropic. The scientific novelty of the work is as follows: the formulation and solution of a number of problems of stability and intrinsic oscillation of anisotropic inhomogeneous rectangular and circular plates with variable specific density, taking into account linear, inhomogeneous, anisotropic and viscoelastic resistance are given; solutions of specific examples are considered, the analysis of which is of applied importance. The reliability of the results of the work is determined by the fact that the formulation of all the considered tasks is based on generally established principles. All solutions of the compiled differential equations are stated mathematically correctly, proven engineering methods are used and confirmed by comparing the results with known solutions obtained by various methods, direct verification of boundary conditions and integral relations.

Keywords: Free oscillation, Stability, Round Plates, Heterogeneous Base, Orthotropic Bodies, Bubnov-Galerkin Method.

1. INTRODUCTION

Depending on the above and a number of other reasons, the mechanical properties of V.A. Lomakin plates [1] significantly depend on the coordinates of points in the directions of the stressed state. In this paper, we will assume that the modulus of elasticity and the specific density depend on the function of the thickness coordinate and the current radius, and the Poisson's ratio is a constant: As is known, in the design, calculation and construction of engineering structures for various purposes, mainline railways, bridges, tunnels, offshore stationary platforms, etc., structural elements made of various elastic and inelastic materials are widely used.

Currently, in connection with the construction of large-scale construction complexes and a number of other industries, designers and calculators are faced with an increased requirement for the most correct and efficient use of the material. In addition, there is a need for a more realistic description of the physical and mechanical properties of the material. One of the above materials is anisotropic materials. Note that anisotropic materials can be natural (for example, wood), obtained as a result of their manufacturing technology (for example, sheet metal, paper, concrete) and anisotropic-constructive (for example, reinforced plates).

Summarizing all the above, it can be concluded that anisotropic materials are divided into three classes: "naturally anisotropic", "technologically anisotropic" and "structurally anisotropic". It should be noted that such a division into classes is conditional and often a new anisotropic material is created as a result of the development of a new technological process for the implementation of a new "design" of a material from known anisotropic and isotropic materials. In the monographs [2, 3], the theory of anisotropic materials was presented for the first time (within the limits of elasticity). Some issues of bending anisotropic plates are considered and a number of recommendations are given that may be useful for research engineers. This is emphasized in the name of one of the types of plastic "FAM", which means, glass is a "fibrous anisotropic material". Such materials are widely used not only in the construction of engineering structures. Currently, artificial materials are used in all spheres of the national economy.

The monograph [3] is a more fundamental monograph devoted mainly to the development of theoretical aspects from the theory of complex media (within elasticity). Numerous problems of the stressed deformed state of anisotropic bodies are considered in [3]. Various theoretical and experimental issues were dealt with by [8], [5], [6] and many others. In these and a number of other scientific studies, issues related to load-bearing capacity, strength and other sections of structural mechanics are widely covered.

However, these works do not investigate the issues of bending and stability, taking into account the influence of various kinds of external resistance. In this review, we will consider those works that were devoted to the generalized plane stress state, which is closely related to the study of stability problems and vibrations of anisotropic plates (along the way, those works that are related to the stability of elastic plates, taking into account and without taking into account the resistance of the external environment, will also be discussed). As noted above, a new anisotropic material is created by developing a new technological process for the implementation of new "structures" of materials known as anisotropic and orthotropic. For example, in [7] an anisotropic material from unidirectional matrices is given. The problems of stability and vibrations of plates of different configurations under different resistance conditions were solved [9, 10]. Works considered the question of vibrations of cylindrical shells when the inhomogeneity sharply depends on all three coordinates [11, 12]. The works [13, 14] are mainly devoted to studies of vibrations of orthotropic inhomogeneous plates made of homogeneous materials without taking into account and taking into account the resistance of the Winkler base.

2. PROBLEM STATEMENT

As it was noted [1, 2, 3], in some cases, when designing and constructing various kinds of interesting structures, sea dams, etc., engineering tasks have to be solved taking into account the influence of an artificially created foundation. It is characteristic of such bases that they resist bending in various ways in the main directions.

In this article, we will investigate the problem of proper oscillation of an anisotropic plate in the case when the specific density depends on the thickness coordinate. The coordinate system is chosen as follows: here, the right coordinate system x, y, z is selected for calculation, the origin of which is in the middle plane. The equation of motion, taking into account anisotropic resistance with inhomogeneity of specific density over the thickness of the plate, looks like this [1, 2]:

$$E = E_0 \chi_1(z) \tag{1}$$

$$l = \mu_0 \xi_1(x) \xi_2(r)$$

$$v = \text{const}$$

where, E_0 and μ_0 are correspond to the homogeneous case; χ_1, ξ_1, ξ_2 are continuous functions. Suppose that the plate performs a transverse axisymmetric oscillation and lies on a base that obeys the following law [8]:

$$K(w) = e_1 w + e_2 \frac{\partial^2 w}{\partial t^2} \tag{2}$$

where, w is the deflection, e_1, e_2 are determined by experiment, and t is time. The equation of motion taking into account (1) and (2) takes the following form [2, 3]:

$$D_0 J (\Delta w)^2 + e_0 w + e_1 \frac{\partial^2 w}{\partial t^2} + \tilde{l} \xi_2(r) \frac{\partial^2 w}{\partial t^2} = 0 \tag{3}$$

The following designations are introduced here:

$$\tilde{l} = \frac{\mu_0}{n} \int_{-H}^H \xi_1(z) dz, \quad J = 12 \int_{-0.5}^{0.5} \chi(z) z^2 dz \tag{4}$$

We will look for the solution (3) in the form of Equation (5) where, $v(r)$ is must meet the corresponding boundary conditions, ω is circular frequency, $H = h/2$ is half the thickness of the plate only plastics, L is plastic radius.

We will assume that the plate is rigidly pinched along the entire contour, although this condition is not fundamental. Substituting (4) into (3), we get [9, 10]:

$$JD_0 (\Delta v(r))^2 + e_1 v(r) - e_2 \omega^2 v(r) - \omega^2 \xi_2(r) \tilde{l} v(r) = 0 \tag{5}$$

We introduce the following notation:

$$\bar{e}_1 = e_1 (JD_0)^{-1}, \quad \bar{e}_2 = a e_2 (JD_0)^{-1}$$

$$\tilde{l}_1 = \tilde{l} (JD_0)^{-1}, \quad D_0 = \frac{E_0 H^3}{12(1-\nu^2)}$$

Then the equation of motion takes the following form:

$$(\Delta v(r))^2 + \bar{e}_1 v(r) - \omega^2 (e_2 + \xi(r) \tilde{l}_1) v(r) = 0 \tag{6}$$

We will search for the solution of Equation (6) using the Bubnov-Galerkin orthogonalization method, and $v(r)$ we will search in the form of a series:

$$v(r) = \sum_{i=1}^n c_i \phi_i(r) \tag{7}$$

where, $\phi_i(r)$ each of them must satisfy the corresponding boundary conditions. For simplicity of the analysis, we take the following notation:

$$P_1(r) = (\Delta v(r))^2 + \bar{e}_1 v(r) \tag{8}$$

$$P_2(r) = (e_2 + \chi(r) \tilde{l}_1) v(r) \tag{9}$$

Given Equations (8) and (9) in (6) and using the orthogonalization method, we can write [4]:

$$\sum_{j=1}^m b_j \int_0^L P_1(\beta_j) \beta_k(r) r dr - \tag{10}$$

$$-\omega^2 \sum_{j=1}^n b_j \int_0^L P_2(\beta_j) \beta_k(r) r dr = 0 \quad (k = \overline{1, \dots, n})$$

Note that Equation (10) is a linear inhomogeneous system of algebraic equations with respect to b_j . For the existence of a nontrivial solution, the main determinant composed of coefficients must be zero [15]:

$$\|\omega^2\| = 0 \tag{11}$$

This equation is called the frequency equation. For practical calculation, it is usually neglected to determine

the pitch of the square of the frequency, which corresponds to the first approximation of the solution. In this case, to determine the frequency, we have Equation (12):

$$\int_0^L P_1(\beta_1) \beta_1(r) r dr - \omega^2 \int_0^L P_2(\beta_1) \beta_1(r) r dr = 0 \tag{12}$$

From Equation (12), we find:

$$\omega^2 = \frac{\int_0^L P_2(\beta_1) \beta_1(r) r dr}{\int_0^L P_1(\beta_1) \beta_1(r) r dr} \tag{13}$$

For the case of the Winkler base Equation (13) takes the form:

$$\omega_b^2 = \frac{\int_0^L (\Delta\beta_1)^2 \beta_1(r) r dr + \bar{b}_1 \int_0^L \beta_1^2(r) r dr}{\bar{l} \int_0^L \xi(r) \beta_1^2(r) r dr} \tag{14}$$

$$\omega_v^2 = \frac{\int_0^L (\Delta\beta_1)^2 \beta_1(r) r dr}{\bar{b}_2 \int_0^L \beta_1^2(r) r dr + \bar{l} \int_0^L \beta(r) \beta_1^2(r) r dr} \tag{15}$$

Without taking into account the resistance, we will have:

$$\omega_\delta^2 = \frac{\int_0^L (\Delta\beta_1)^2 \beta_1(r) r dr}{\bar{l} \int_0^L \chi(r) \beta_1^2(r) r dr} \tag{16}$$

If the plate is inhomogeneous only in thickness, then we get:

$$\omega_T^2 = \frac{\int_0^L (\Delta\beta_1)^2 \beta_1(r) r dr + \bar{b}_1 \int_0^L \beta_1^2(r) r dr}{\bar{b}_2 \int_0^L \beta_1^2(r) r dr + \bar{l} \int_0^L \chi(r) \beta_1^2(r) r dr} \tag{17}$$

If the plate is inhomogeneous only in radius, then formula (14) takes the following form ($J = 1$):

$$\omega_R^2 = \frac{\int_0^L (\Delta\beta_1)^2 \beta_1(r) r dr + b_1 D_0^{-1} \int_0^L \beta_1^2(r) r dr}{b_2 D_0^{-1} \int_0^L \beta_1^2(r) r dr + l_0 D_0^{-1} \int_0^L \chi(r) \beta_1^2(r) r dr} \tag{18}$$

If the properties of the plate do not depend on the coordinates of the points, then the Equation (18) takes the following form:

$$\omega_0^2 = \frac{\int_0^L (\Delta\beta_1)^2 \beta_1(r) r dr + b_1 D_0^{-1} \int_0^L \beta_1^2(r) r dr}{b_2 D_0^{-1} \int_0^L \beta_1^2(r) r dr + l_0 D_0^{-1} \int_0^L \beta_1^2(r) r dr} \tag{19}$$

In the case of Winkler, resistance Equation (19) takes the following value:

$$\omega_0^2 = \frac{\int_0^L (\Delta\beta_1)^2 \beta_1(r) r dr + b_1 D_0^{-1} \int_0^L \beta_1^2(r) r dr}{l_0 D_0^{-1} \int_0^L \beta_1^2(r) r dr}$$

or

$$\omega_0^2 = \frac{\int_0^L (\Delta\beta_1)^2 \beta_1(r) r dr}{l_0 D_0^{-1} \int_0^L \beta_1^2(r) r dr} + \frac{b_1}{l_0} \tag{20}$$

From the Equations (19) and (20) we obtain:

$$\left(\frac{\omega_R}{\omega_0}\right)^2 = \frac{b_2 D_0^{-1} \int_0^L \beta_1^2(r) r dr + l_0 D_0^{-1} \int_0^L \beta_1^2(r) r dr}{b_2 D_0^{-1} \int_0^L \beta_1^2(r) r dr + l_0 D_0^{-1} \int_0^L \chi(r) \beta_1^2(r) r dr}$$

$$\left(\frac{\omega_R}{\omega_0}\right)^2 = \frac{1 + l_0 b_2^{-1}}{1 + l_0 b_2^{-1} \int_0^L \chi(r) \beta_1^2(r) r dr \left(\int_0^L \beta_1^2(r) r dr\right)^{-1}} \tag{21}$$

3. PROBLEM SOLUTION

To illustrate, consider the case of a hard pinching along the entire contour. The following conditions must be satisfied:

$$w = 0, \quad \frac{dw}{dr} = 0 \quad \text{by } r = L \tag{22}$$

As an approximating function, we will take the following approximation:

$$\beta(r) = \chi_0 \left[1 - \left(\frac{r}{L}\right)^2 \right]^2 \tag{23}$$

Note that we can also take the following approximation [12]:

$$\beta(r) = \chi_0 \left[1 - \left(\frac{r}{L}\right)^2 \right] \left(\frac{r}{L}\right)^{2(n-1)}, \quad n = 2, 3, \dots \tag{24}$$

where, the analysis will be conducted for the Equation (23). Consider the case $\chi(r) = 1 + \delta \frac{r}{L}$, $\delta \in [0, 1]$. To calculate, it is necessary to calculate the expression:

$$K = \int_0^L \chi(r) \beta_1^2(r) r dr \left(\int_0^L \beta_1^2(r) r dr \right)^{-1} \tag{25}$$

For the linear case we get:

$$K = \int_0^L \left(1 + \delta \frac{r}{L} \right) \beta_1^2(r) r dr \left(\int_0^L \beta_1^2(r) r dr \right)^{-1} = \left[\int_0^L \beta_1^2(r) r dr + \delta \int_0^L \frac{r}{L} \beta_1^2(r) r dr \right] \left(\int_0^L \beta_1^2(r) r dr \right)^{-1} \tag{26}$$

From here we get

$$k = 1 + \delta \frac{\int_0^1 \bar{r}^2 \beta_1^2(\bar{r}) d\bar{r}}{\int_0^1 \beta_1^2(\bar{r}) \bar{r} d\bar{r}}, \quad \bar{r} = \frac{r}{L} \quad (27)$$

Taking into account (27), formula (21) can be given the following form:

$$\left(\frac{\omega_R}{\omega_0}\right)^2 = \frac{1 + l_0 b_2^{-1}}{1 + l_0 b_2^{-1} K} \quad (28)$$

We reveal the integrals that are included in Equation (27), respectively, the numerator and denominator and get

$$\int_0^1 \bar{r}^2 \beta_1^2(\bar{r}) d\bar{r} \quad \text{and} \quad \int_0^1 \beta_1^2(\bar{r}) \bar{r} d\bar{r}$$

$$F_1(\bar{r}^2, \bar{r}^4, \bar{r}^6) = \frac{31}{105}, \quad F_2(\bar{r}, \bar{r}^3, \bar{r}^4) = \frac{1}{6} \quad (29)$$

Substituting (29) into (28), we finally obtain an expression for determining the parameter proper oscillation of an inhomogeneous circular plate, taking into account viscoelastic resistance:

$$\left(\frac{\omega_R}{\omega_0}\right)^2 = \frac{1 + l_0 b_2^{-1}}{1 + l_0 b_2^{-1} K} = \frac{1 + l_0 b_2^{-1}}{1 + l_0 b_2^{-1} (1 + 1.953\delta)} \quad (30)$$

As can be seen from the graphs presented, taking into account the inhomogeneity of the resistance of the medium significantly affects the values of the critical parameters.

When, $\delta = 0$ we get: $\left(\frac{\omega_R}{\omega_0}\right)^2 = 1$. The graph of the

dependence of $\left(\frac{\omega_R}{\omega_0}\right) \sim \delta$, is shown in Figure 1. For specific values of the parameters E_0, l_0, ν and the selected forms of the function χ_1, ξ_1, ξ_2 numerical calculations are carried out and the results are presented in Figure 1.

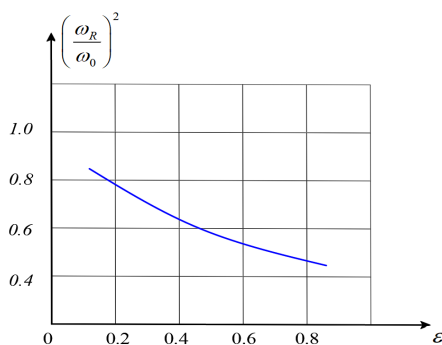


Figure 1. Graph of frequency dependence on the inhomogeneity parameter in a linear arrangement

4. CONCLUSIONS

Some problems of stability and natural oscillations of continuously in homogeneously anisotropic rectangular and round plates are formulated and solved, taking into account various kinds of external forces, the influence of environmental resistance, and a method for their solutions is constructed.

Taking into account the two-constant, inhomogeneous and inhomogeneous viscoelastic modulus, specific formulas for determining the frequency value depending on the parameters of the base and the mechanical properties of inhomogeneous elastic orthotropic plates are found by approximate analytical methods.

The formulation of the problems of natural oscillations of in homogeneously anisotropic rectangular and round plates with different homogeneous boundary conditions is considered for the first time and a method for their solutions is constructed. The problem of natural oscillations is solved for the first time, taking into account the influence of inhomogeneous viscoelastic resistance, when the properties of the material are anisotropic, their elastic characteristics and density are continuous functions of three spatial coordinates. With the use of approximate analytical methods, specific formulas for engineering calculation are obtained.

REFERENCES

- [1] V.A. Lomakin, "Theory of Elasticity of Inhomogeneous Bodies", Publishing House of Moscow State University, p. 376, Moscow, Russia, 1976.
- [2] S.G. Lehnitsky, "Theory of Anisotropic Plates", Gostekhizdat, p. 445, Moscow, Russia, 1977.
- [3] S.G. Lehnitsky, "Theory of Elasticity of an Anisotropic Body", Publishing House of Moscow State University, p. 276, Moscow, Russia, 1976.
- [4] M.T. Huber, "Theoretical and Applied", The Polish Academy of Sciences, Vol. 4, p. 438, Warszawa, Poland, 1970.
- [5] A.K. Malmeister, V.M. Tamuzh, G.A. Teters, "Resistance of Polymer and Composite Materials", Academic and special literature, Mechanics, p. 247, Riga, Latvia, 1969.
- [6] B.E. Pobedrya, "Mechanics of Composite Materials", Moscow State University Publishing House, p. 336, Moscow, Russia, 1984.
- [7] T.A. Butina, "Stability of a Cylindrical Shell under Combined Loading", Bulletin of the Moscow State Technical University. Ser.est. Sciences., Special Issue, No. 3, pp. 127-133, Moscow, Russia, 2012.
- [8] N.A. Alfutov, "Fundamentals of Calculation for the Stability of Elastic Systems", The 2nd ed., M, Mechanical Engineering, p. 336, 1991.
- [9] V.L. Sharifov, "On the Stability of a Rectangular Orthotropic Rectangular Plate Lying on an Inhomogeneous Base", Theoretical and Applied Mechanics, No. 2, pp. 96-100, Baku, Azerbaijan, 2006.
- [10] V.L. Sharifov, "Stability of Inhomogeneous Anisotropic Plates in an Anisotropically Resistive Medium under Bilateral Compression", Theoretical and Applied Mechanics, No. 1, pp. 85-91, Baku, Azerbaijan, 2013.
- [11] R.A. Iskanderov, J.M. Tabatabaei, "Vibrations of Fluid-Filled Inhomogeneous Cylindrical Shells Strengthened with Lateral Ribs", International Journal on Technical and Physical Problems of Engineering (IJTPE), Issue 42, Vol. 12, No. 1, pp. 121-125, March 2020.
- [12] J.M. Tabatabaei, "Investigation of Oscillatory Motion of Inhomogeneous Longitudinally Reinforced Cylindrical

Shells with a Visco-Elastic Medium", International Journal on Technical and Physical Problems of Engineering (IJTPE), Issue 53, Vol. 14, No. 4, pp. 182-188, December 2022.

[13] S. Jalali, M. Maei, A. Poorsolhjoui, "Buckling of Circular Sandwich Plates of Variable Core Thickness and FGM Face Sheets", Structural Stability and Dynamics, Vol. 11, No. 2, pp. 273-295, 2011.

[14] A.A. Ghorbanpour, Sh. Maghamikia, M. Mohammadimehr, "Buckling Analysis of Laminated Composite Rectangular Plates Reinforced by SWCNTs Using Analytical and FINIT Element Methods", Mechanical Sciences and Technology, Vol. 25, No. 3, pp. 809-820, 2011.

[15] A.G. Kurosh, "Course of Higher Algebra", Nauka, p. 431, Moscow, Russia, 1965.

BIOGRAPHIES



Name: Valeh

Middle Name: Latif

Surname: Sharifov

Birthdate: 26.04.1965

Birthplace: Tsalka, Kvemo Kartli, Georgia

Master: Civil Engineer, Moscow Automobile and Road Institute, Moscow, Russia, 1989

Doctorate: Construction Mechanics, Azerbaijan University of Architecture and Construction, Baku, Azerbaijan, 2018

The Last Scientific Position: Assoc. Prof., Department of Transport and Logistics, Faculty of Transport, Azerbaijan Architecture and Construction University, Baku, Azerbaijan, Since 2018

Research Interests: Solid Mechanics, Strength, Stability and Mechanics of Composite Materials

Scientific Publications: 16 Papers, 2 Monographs, 3 Textbooks



Name: Rashad

Middle Name: Abulfaz

Surname: Allahverdiyev

Birthdate: 26.01.1984

Birthplace: Gadabay, Azerbaijan

Bachelor: Organization of Road Traffic, Transportation and Logistics,

Transportation, Azerbaijan University of Architecture and Construction, Baku, Azerbaijan, 2005

Master: Organization of Road Traffic Transportation and Logistics, Transportation, Azerbaijan University of Architecture and Construction, Baku, Azerbaijan, 2007

Doctorate: Mechanics of Deformable Solid Body, Institute of Mathematics and Mechanics, Baku, Azerbaijan, 2015

The Last Scientific Position: Assoc. Prof., Transport and Logistics Department, Azerbaijan University of Architecture and Civil Engineering, Baku, Azerbaijan, Since 2017

Research Interests: Solid Mechanics, mechanics of destruction, Stability and mechanics of composite materials

Scientific Publications: 19 Papers, 2 Monograph, 2 Textbook, 1 Methodological Instruction, 6 Theses



Name: Bayram

Middle Name: Mirazim

Surname: Aslanov

Birthdate: 20.03.1987

Birthplace: Vardenis, Armenia

Bachelor: Engineer Construction of Engineering Systems and Structures,

Faculty of Water Management and Engineering Communication Systems, Azerbaijan University of Architecture and Construction, Baku, Azerbaijan, 2008

Master: Engineer Construction of Engineering Systems and Structures, Faculty of Water Management and Engineering Communication Systems, Azerbaijan University of Architecture and Construction, Baku, Azerbaijan, 2010

Doctorate: Hydrotechnical Construction, Azerbaijan University of Architecture and Construction, Baku, Azerbaijan, 2015

The Last Scientific Position: Assist. Prof., Department of Construction of Amelioration and Water Management, Azerbaijan University of Architecture and Construction Baku, Azerbaijan, Since 2021

Research Interests: Solid Mechanics; Strength, Stability and Mechanics of Composite Materials

Scientific Publications: 18 Papers, 1 Methodological Instruction, 6 Theses

Research Interests: Solid Mechanics; Strength, Stability and Mechanics of Composite Materials

Scientific Publications: 18 Papers, 1 Methodological Instruction, 6 Theses

Research Interests: Solid Mechanics; Strength, Stability and Mechanics of Composite Materials

Scientific Publications: 18 Papers, 1 Methodological Instruction, 6 Theses



Name: Elchin

Middle Name: Azer

Surname: Pashayev

Birthdate: 29.05.1989

Birth Place: Shirvan, Azerbaijan

Bachelor: Engineer Construction of Engineering Systems and Structures,

Faculty of Water Management and Engineering Communication Systems, Azerbaijan University of Architecture and Construction, Baku, Azerbaijan, 2013

Master: Engineer Construction of Engineering Systems and Structures, Faculty of Water Management and Engineering Communication Systems, Azerbaijan University of Architecture and Construction, Baku, Azerbaijan, 2015

Doctorate: Student, Hydrotechnical Construction, Azerbaijan University of Architecture and Construction, Baku, Azerbaijan, Since 2015

The Last Scientific Position: Head of Project Evaluation Department, Ministry of Health, Baku, Azerbaijan, Since 2019

Research Interests: Hydrotechnical Construction, Stability and Mechanics of Composite Materials

Scientific Publications: 15 Papers

Research Interests: Hydrotechnical Construction, Stability and Mechanics of Composite Materials

Scientific Publications: 15 Papers